




M230i Corner Wrap

Reliable, secure labelling

The M-Series Corner Wrap **i-Tech** units are flexible and reliable automated Print & Apply tamp solutions. Incorporating the latest **i-Tech** features, the innovative corner wrap functionality and high labelling speed allow it to keep pace with most carton erector and filling lines.

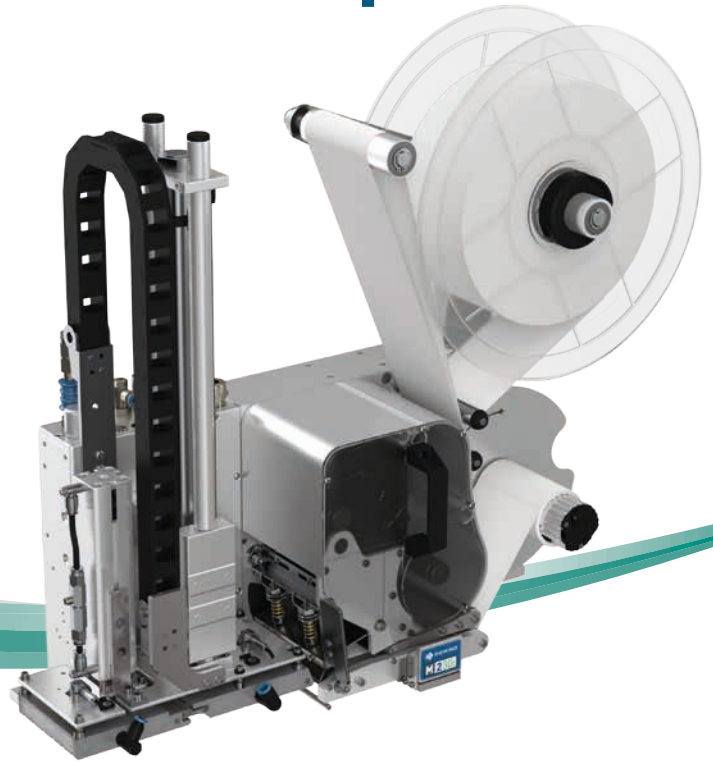

Easy to operate - simple operation and unrivalled capability

- ◆ Clear monitoring & control with optional **TouchPanel** colour user interface
- ◆ Easy navigation and operation with intuitive **QuickStep** software
- ◆ Minimum downtime with tool-free magnetic printhead mounting system & expanding ribbon mandrels

Lower Total Cost of Ownership – reduced cost and increased efficiency

- ◆ Increased printhead life
- ◆ Lower material wastage with full label coverage allowing optimum label size
- ◆ Increased uptime with fast consumable and print head changes

Improved performance - sets the standard for efficiency

- ◆ 600m ribbon & label roll capacity within a compact footprint
- ◆ Increased print speed for reduced cycle times
- ◆ Robust design supports all mounting orientations



Domino. Do more.

Accurate label placement


The unique dual pad design ensures label placement accuracy to facilitate consistent downstream barcode reading, with the ability to handle variable label sizes.

As integration of software is an essential element in the design of the line, our cooperation with leading software companies makes integration simple and is the foundation for through-process serialisation.

Optional *QuickStep* User Interface

For effortless control and status reporting *QuickStep* is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

- ◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.
- ◆ Easy, prompted input of data into label templates.
- ◆ Speed up changeovers and help eliminate coding selection errors with simplified Message Store and live WYSIWYG preview.

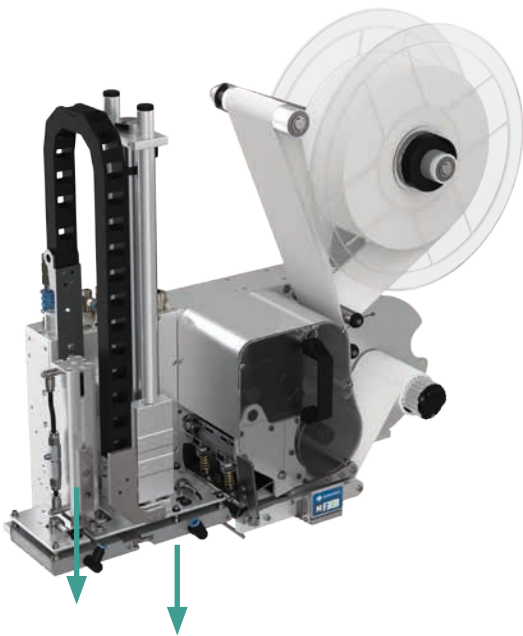

Technical Specification

| | |
|-------------------------|--|
| Print technologies: | Thermal Transfer |
| Print resolutions: | 12 dots/mm (300dpi) |
| Typical speeds: | 12-15 labels per min |
| Label sizes: | Up to 110 x 254mm |
| Label & ribbon lengths: | 600m |
| Distance to product: | Up to 280mm |
| Pneumatics: | 6 bar compressed air |
| Communication: | 2 x RS232, 1 x USB 2.0, Ethernet |
| I/Os (configurable): | 10 Inputs and 10 Outputs |
| User interface: | Graphical display with 25 languages |
| Overall Dimensions: | 668 x 516 x 243mm (Printer & Applicator min) 668 x 858 x 314mm (Printer & Applicator max) 406 x 278 x 129mm (Controller - PCU) |

OEM Print Engine version available. For further details, contact us.